

Solenoid operated poppet valve

Flange construction

- ◆ 2/2-, 3/2- und 3/4-way
- ◆ normally open and normally closed
- ◆ $Q_{max} = 15 \text{ l/min}$
- ◆ $P_{max} = 350 \text{ bar}$

DESCRIPTION

Direct operated 2/2-, 3/2 and 3/4-way solenoid poppet valve in sandwich construction. By means of the pressure tight switching solenoid, the poppet valve spool is opened or closed acting against the spring. Due to the poppet spool construction with pressure compensation on both sides, the flow through the valve is possible in both directions. The metallic sealing seat closes the valve virtually leak free. The pressure tight encapsulated Ex-protection solenoid coil prevents an explosion on the inside penetrating to the outside as well as an ignitable surface temperature.

CERTIFICATES


	Surface	Mining	Standard -25 °C to...	Z604 -40 °C to...
ATEX	x	x	x	x
IECEX	x	x	x	x
CCC	x	x	x	x
EAC	x	x	x	x
Australia	x	x	x	x
MA		x	x	
UL / CSA	x		x	x

The certificates can be found on www.wandfluh.com

NG4-Mini

Wandfluh standard

- ⊕ II 2 G Ex db IIC T6, T4
- ⊕ II 2 D Ex tb III C T80 °C, T130 °C
- ⊕ I M2 Ex db I Mb
- Class I Division 1
- Class I Zone 1

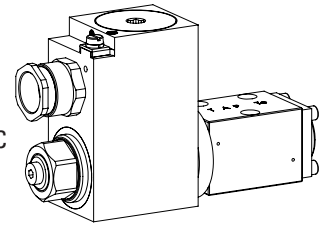

APPLICATION

These valves are suitable for applications in explosion-hazard areas, open cast and also in mines. Poppet valves are used where tight closing functions of the valve are essential like leakage-free load holding, clamping or gripping. Miniature valves are used where both, reduced dimensions and weight are important.

ACTUATION

Actuation	Switching solenoid, wet pin push type, pressure tight
Execution	MKY45 / 18x60 (data sheet 1.1-183) MKU45 / 18x60 (data sheet 1.1-184)
Connection	Cable gland for cable $\varnothing 6,5 \dots 14 \text{ mm}$

Attention! The UL execution is always supplied without cable gland




STANDARDS


Explosion protection	Directive 2014 / 34 / EU (ATEX)
Flameproof enclosure	EN / IEC / UL 60079-1, 31
Cable entry	EN 60079-0, 1, 7, 15, 31
Mounting interface	Wandfluh standard
Protection class	EN 60 529
Contamination efficiency	ISO 4406

SYMBOL


B.22040b




B.22041a




B.32040b



B.32041a



B.3404

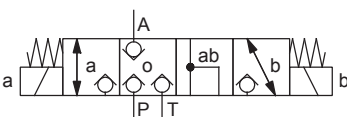

TYPE CODE

 2/2 or 3/2 way execution
 3/4 way execution

 B Exd 2 04 - / / - #
 B Exd 3 4 04 - / / - #

Mounting interface according to Wandfluh standard

Explosion-proof execution, Ex d

 2 way (connections) 2
 3 way (connections) 3

 2 switching positions
 4 switching positions

Nominal size 4-Mini

 Normally closed Solenoid on A-side 1a
 Normally open Solenoid on B-side 0b

 Nominal voltage U_N 12 VDC G12 115 VAC R115
 24 VDC G24 230 VAC R230

 Nominal power P_N 9 W L9
 15 W L15
 17 W L17
Ambient temperature up to:
 40 °C or 90 °C
 70 °C
 70 °C (only UL / CSA)

 Certification ATEX, IECEx, EAC, CCC
 Australia AU UL / CSA UL MA MA

 Sealing material NBR
 FKM (Viton) D1
 NBR -40° C Z604 (only with 15 W)

Design index (subject to change)

1.11-3132



GENERAL SPECIFICATIONS

Designation	2/2-, 3/2- and 3/4-way poppet valve
Construction	Direct operated
Mounting	Flange construction
Nominal size	NG4-Mini according to Wandfluh standard
Actuation	Ex-protection switching solenoid
Ambient temperature	Operation as T6 -25...+40 °C (L9) Operation as T4 -25...+90 °C (L9) -25...+70 °C (L15 / L17) -40...+70 °C (L15 / L17)
Weight	3,2 kg (2/2- and 3/2-way) 5,0 kg (3/4-way)
MTTFd	150 years

HYDRAULIC SPECIFICATIONS


Working pressure	$p_{max} = 350$ bar
Maximum volume flow	$Q_{max} = 15$ l/min, see characteristic
Volume flow direction	Any (see characteristic)
Leakage oil	Poppet type, max. 0,05 ml / min (approx. 1 drop / min) at 30 cSt
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm ² /s...320 mm ² /s
Temperature range fluid	Operation as T6 NBR -25...+40 °C (L9) FKM -20...+40 °C (L9) Operation as T4 NBR -25...+70 °C (L9 or L15 / L17) FKM -20...+70 °C (L9 or L15 / L17) NBR 872 -40...+70 °C (L15 / L17)
Contamination efficiency	Class 20 / 18 / 14
Filtration	Required filtration grade $\beta_{10...16} \geq 75$, see data sheet 1.0-50


PERFORMANCE SPECIFICATIONS

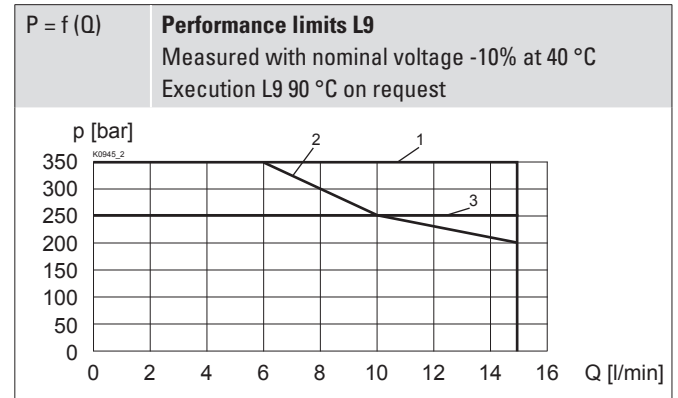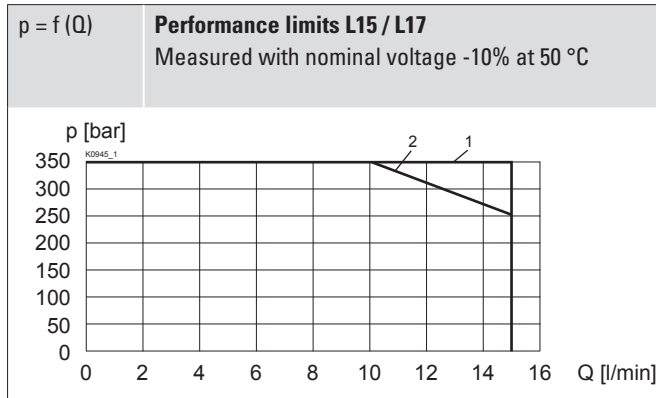
 Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$


Type	Flow direction			
	P - A	A - T	A - P	T - A
BEXd22041a	1	-	1	-
BEXd22040b	1	-	1	-
BEXd32041a	1	1	2	1
BEXd32040b	1	1	1	1
BEXd3404	1	1	1	1

Type	Flow direction			
	P - A	A - T	A - P	T - A
BEXd22041a	1	-	1	-
BEXd22040b	1	-	2	-
BEXd32041a	1	2	1	1
BEXd32040b	1	1	3	1
BEXd3404	1	1	1	1

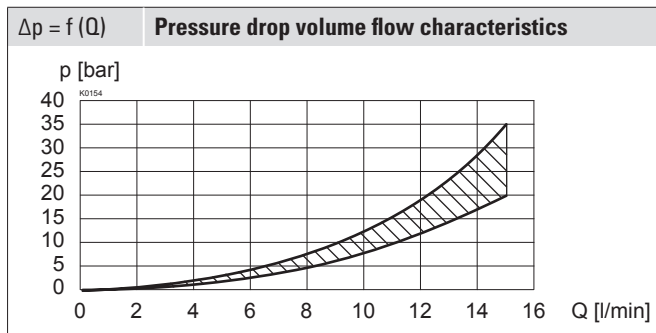

Note!  With the L15 / L17 execution for ambient temperatures up to 70 °C, the performance specifications have been evaluated with an ambient temperature of 50 °C

Attention!  Long periods of non-actuation can reduce the switching performance

SURFACE TREATMENT


- ◆ The valve body is painted with a two component paint
- ◆ The cover, the slip-on coil and the armature tube are zinc-nickel coated

VALVES INSTALLED

The central functioning element is the poppet valve cartridge NG4, data sheet 1.11-2020.

ELECTRICAL SPECIFICATIONS

Protection class	IP67
Relative duty factor	100 % DF
Switching frequency	12'000 / h
Voltage tolerance	± 10 % with regard to nominal voltage
Standard nominal voltage	12 VDC, 24VDC, 115 VAC, 230 VAC AC = 50 to 60 Hz ± 2 %, with built-in two-way rectifier
Standard nominal power	9 W, 15 W, 17 W
Temperature class	Nominal power 9 W: T1...T6 Nominal power 15 W / 17 W: T1...T4


Note!  Other electrical specifications see data sheet 1.1-183 and 1.1-184

SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code

DIMENSIONS

3/2-; 2/2-way

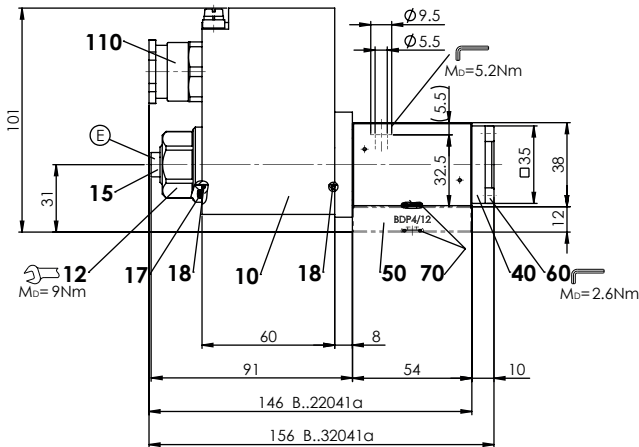


E = Air bleed screw

Dimensions of the solenoid coil see data sheet 1.1-183 and 1.1-184

The distance plate BDP4/12 has to be ordered separately

3/4-way

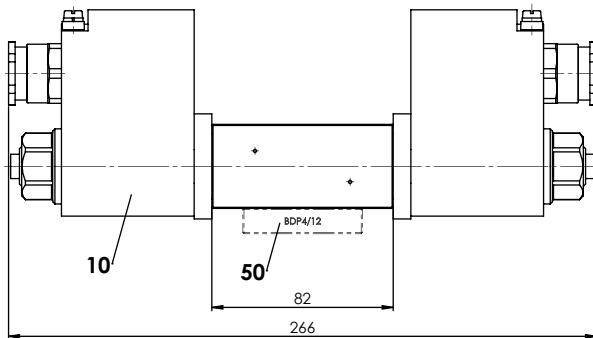
PARTS LIST

Position	Article	Description
10	263.6...	Solenoid coil MKY45 / 18 x 60
12	154.2603	Knurled nut Ex M18 x 1,5 x 18
15	239.2033	Screw plug HB0 (incl. seal)
17	160.2251	O-ring ID 25,07 x 2,62 (NBR)
18	160.2170	O-ring ID 17,17 x 1,78 (NBR)
40	057.4201	Cover
50	173.1450	Distance plate BDP4 / 12
60	246.1113	Socket head screw M4 x 12 DIN 912
70	160.2052	O-ring ID 5,28 x 1,78 (NBR)
	160.6052	O-ring ID 5,28 x 1,78 (FKM)
110	111.1080	Cable gland M20 x 1,5



COMMISSIONING

Attention! When commissioning, the valve must be vented under pressure (max. two rotations of screw E).



The solenoid coil must only be put into operation, if the requirements of the operating instructions supplied are observed to their full extent. In case of non-observance, no liability is assumed.

3/2-; 2/2-way

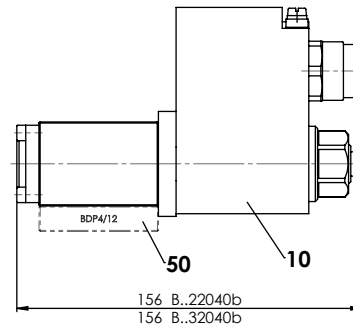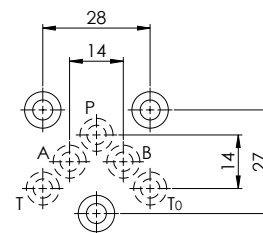
HYDRAULIC CONNECTION

MANUAL OVERRIDE

Screw plug (HB0), no actuation possible

Optionally: HB4,5, HN(K) or HG(K)

→ See data sheet 1.1-311

ACCESSORIES

Fixing screws	Data sheet 1.0-60
Threaded subplates	Data sheet 2.9-05
Multi-station subplates	Data sheet 2.9-45
Horizontal mounting blocks	Data sheet 2.9-85
Technical explanations	Data sheet 1.0-100
Hydraulic fluids	Data sheet 1.0-50
Filtration	Data sheet 1.0-50
Relative duty factor	Data sheet 1.1-430

INSTALLATION NOTES

Mounting type	Flange mounting 3 fixing holes for socket head screws M5 x 40 or M5 x 50 (with distance plate BDP4/12)
Mounting position	Any, preferably horizontal
Tightening torque	Fixing screws $M_D = 5,2 \text{ Nm}$ (screw quality 8.8, zinc coated) $M_D = 5 \text{ Nm}$ knurled nut

Note!


The length of the fixing screw depends on the base material of the connection element.

Attention!


For stack assembly please observe the remarks in the operating instructions

Wandfluh AG Postfach CH-3714 Frutigen
 Tel. +41 33 672 72 72 Fax +41 33 672 72 12 sales@wandfluh.com